



Código: Ver tabla
(Dimensiones generales)

Acabado: Niquelado

Material: Acero- Q195

Unidad de medida: Pieza

Ángulo de apertura: 110°


Profundidad de la cazoleta: 12

(k) recomendado: 4

Espesor de acabado: 1,1 - 1,3µm

Prueba de corrección: 16 - 18hrs.

Diagrama de instalación:

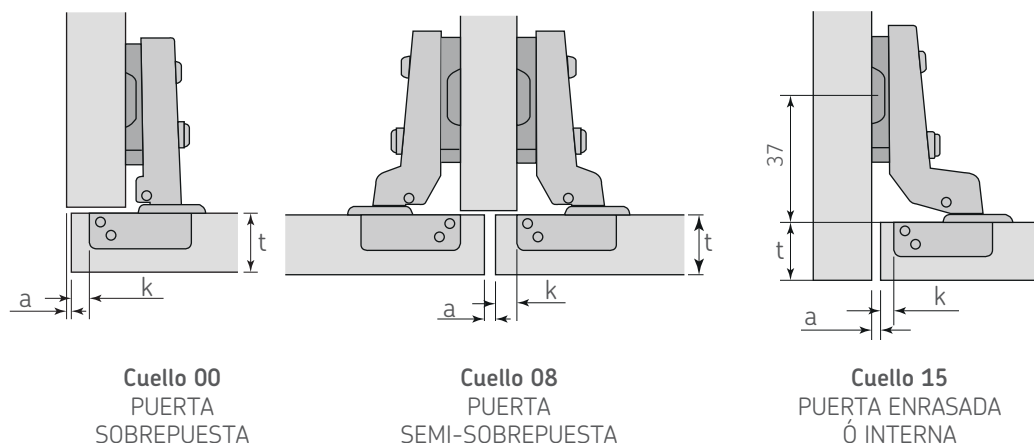

FULL-OVERLAY

0601-209

HALF-OVERLAY

0601-210


INSET

0601-211

t=	16	17	18	19	20	21	22
k=3 a=	0.57	0.74	1.11	1.45	1.81	2.38	3.10
k=4 a=	0.55	0.72	1.05	1.39	1.75	2.25	2.87
k=5 a=	0.53	0.70	0.99	1.33	1.67	2.12	2.64
k=6 a=	0.51	0.69	0.93	1.27	1.61	1.99	2.49
k=7 a=	0.50	0.67	0.87	1.21	1.55	1.89	2.35

t Espesor de la puerta
a Fuga mínima
k Distancia de perforación


Diagrama de Producto:

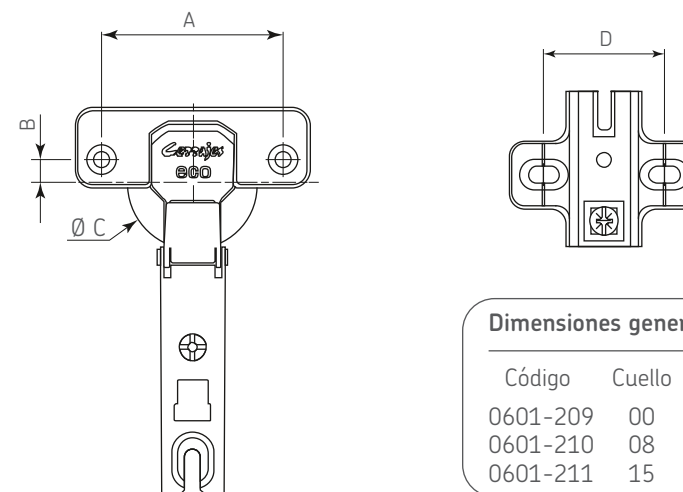


Dimensiones generales

Código	Cuello	A	B	C	D
0601-209	00	48	6	Ø 35	32
0601-210	08	48	6	Ø 35	32
0601-211	15	48	6	Ø 35	32

Perforación del gabinete

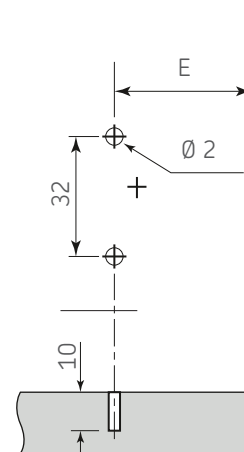


Perforación de la puerta

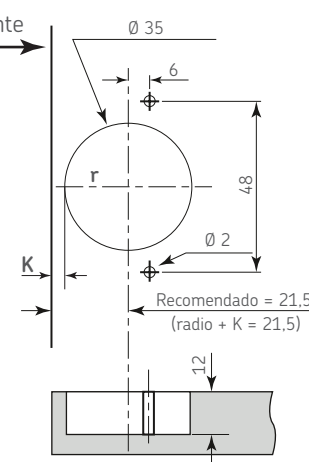


Código	Cuello	E
0601-209	00	37
0601-210	08	37
0601-211	15	37+t



Sistema de montaje:

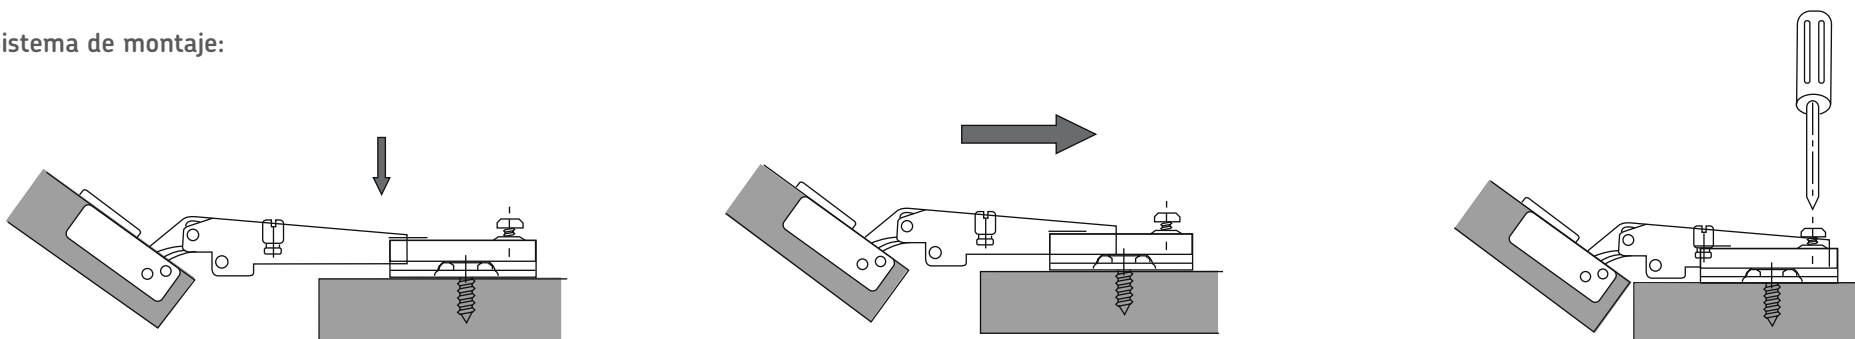

Ajuste:

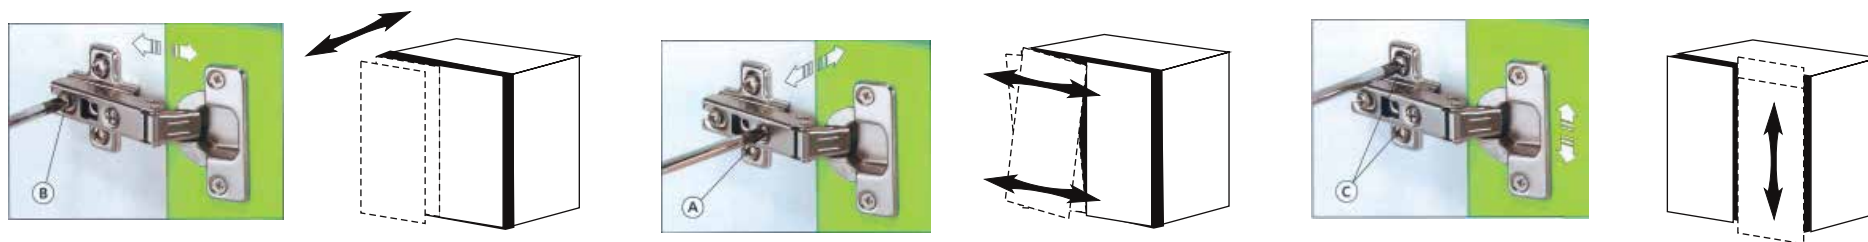

Ajuste frontal

Ajuste horizontal

Ajuste vertical